



1/4

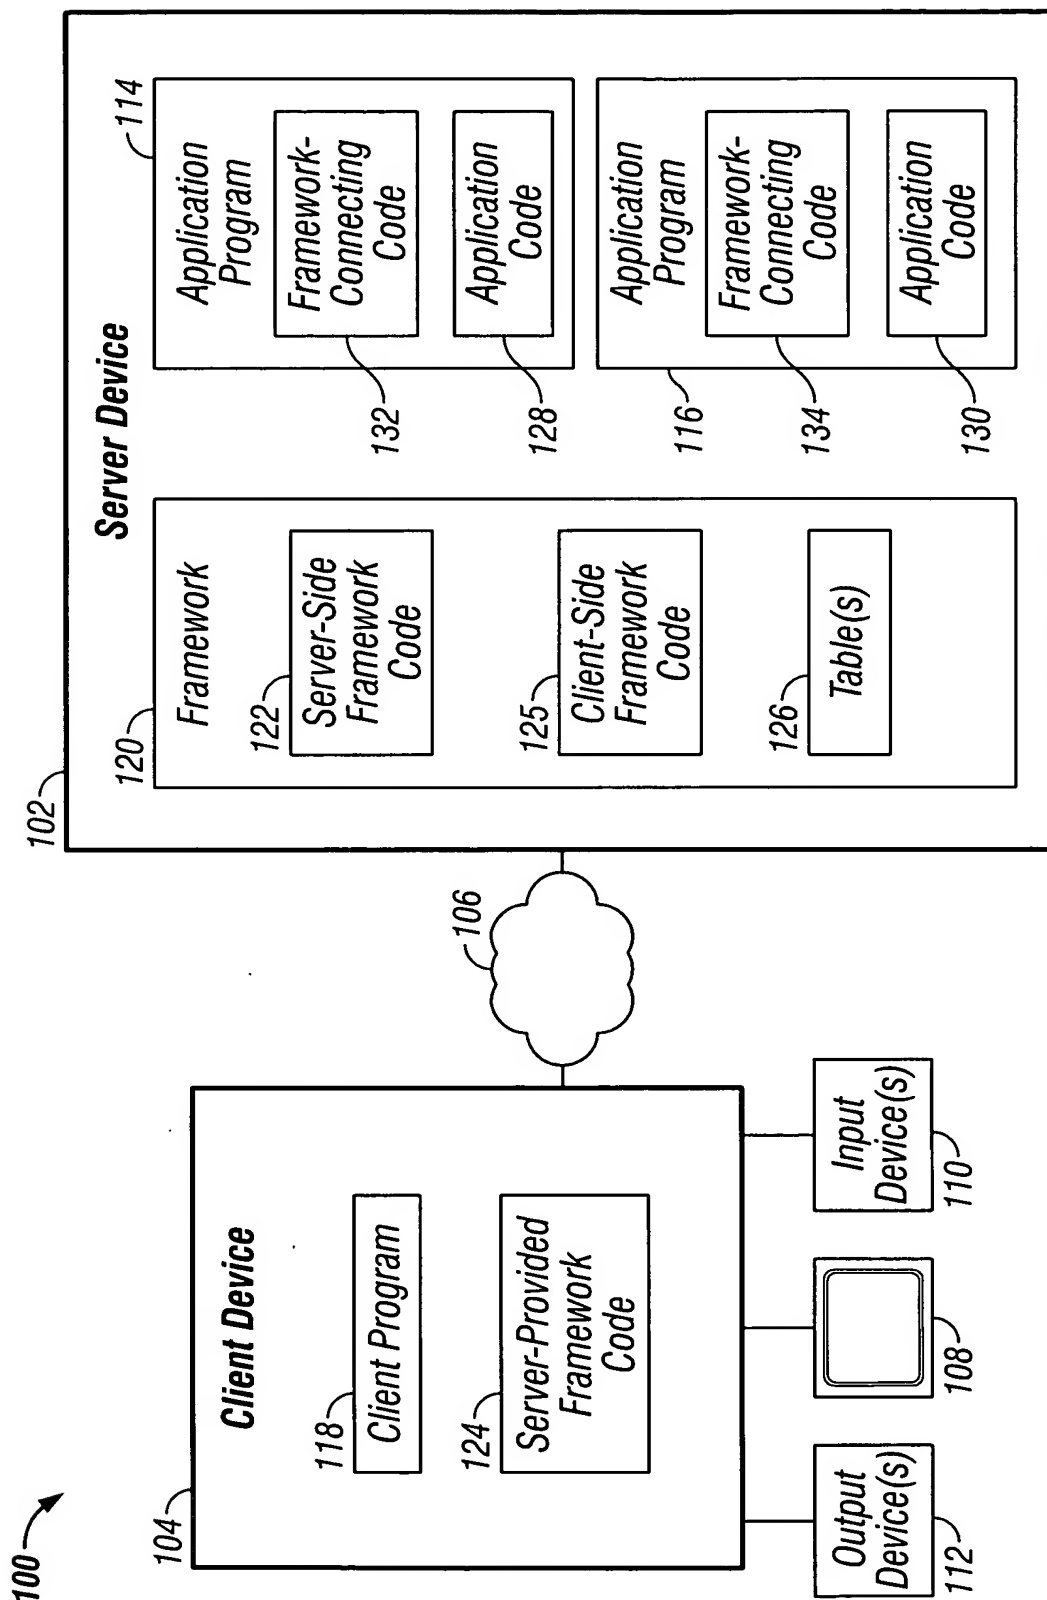


FIG. 1



2/4

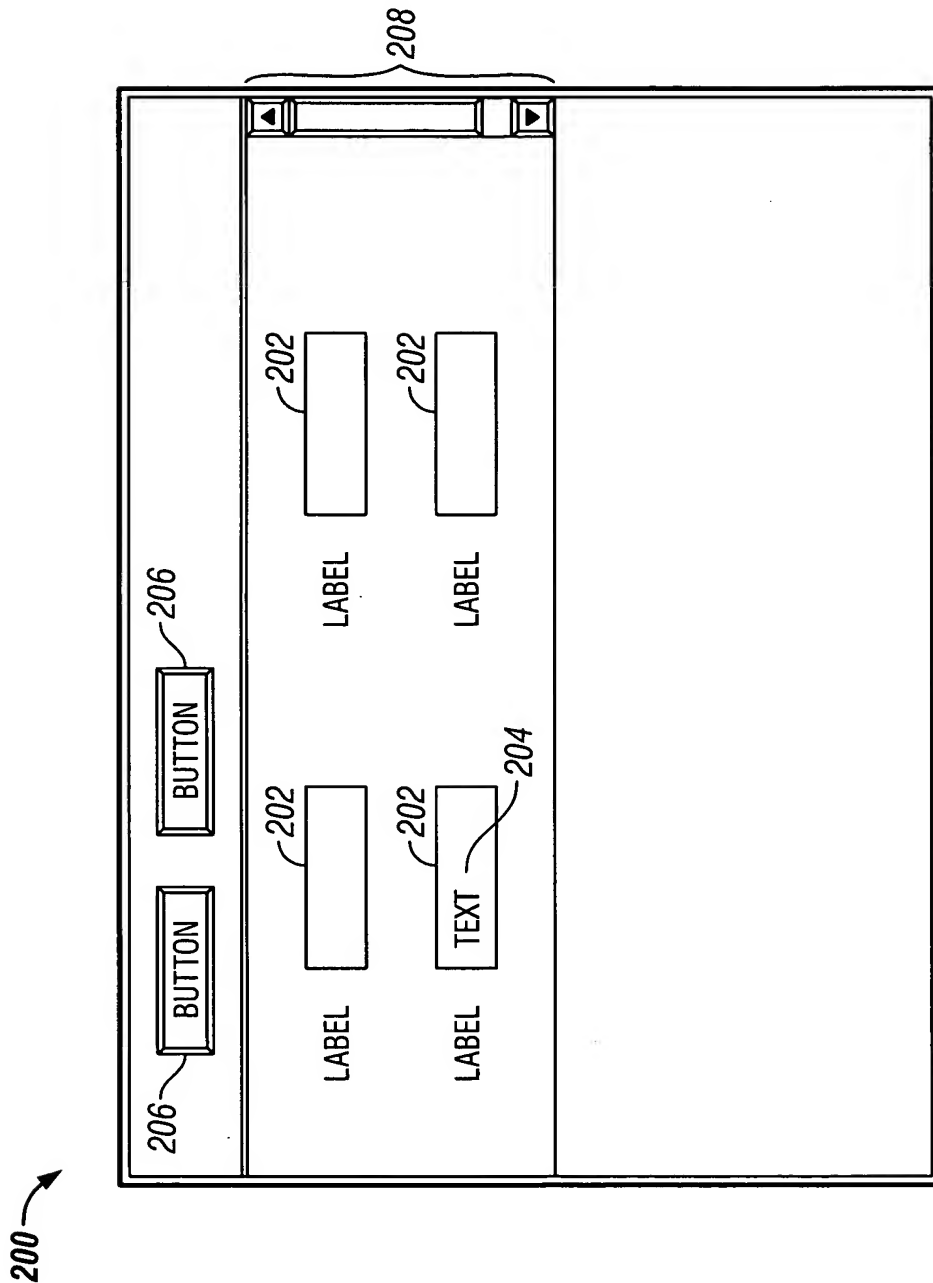


FIG. 2



3/4

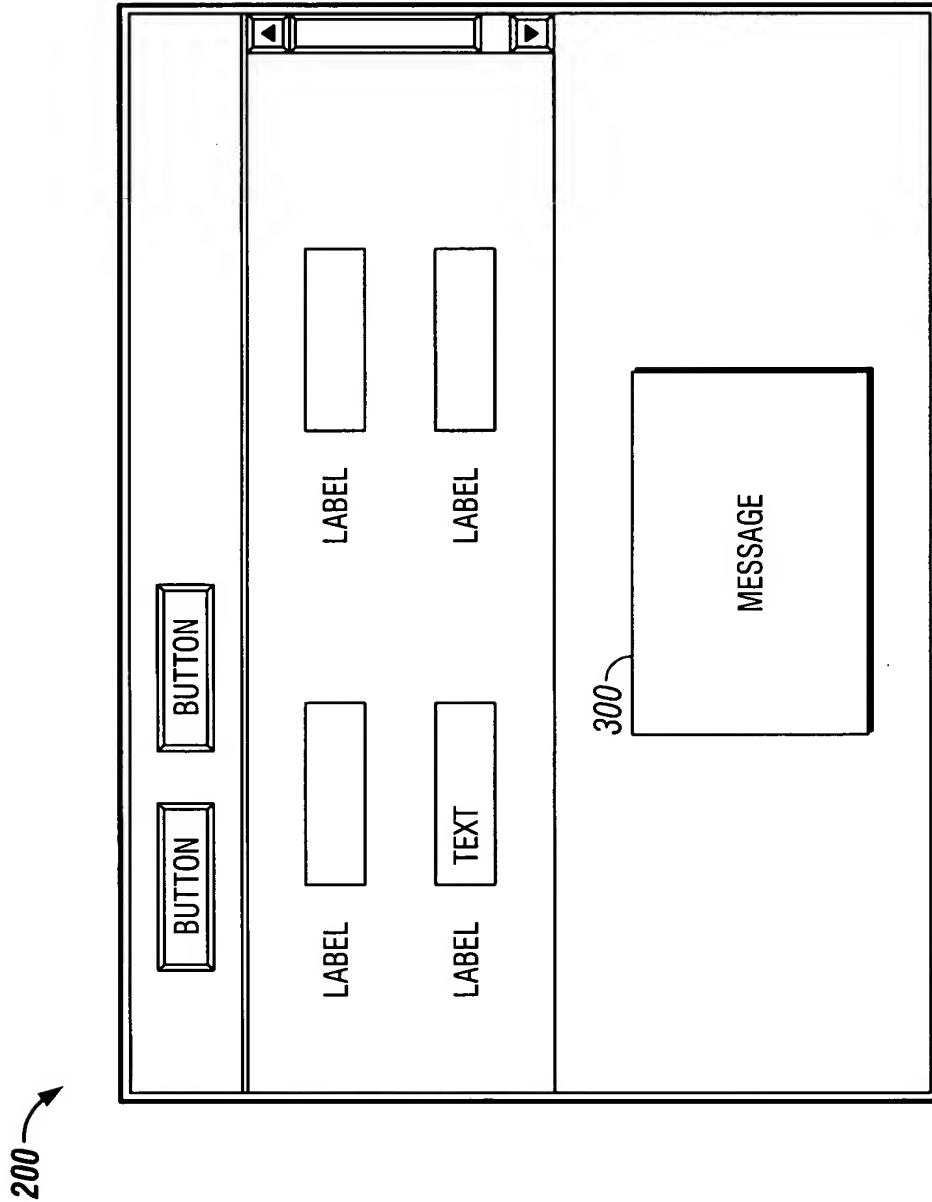


FIG. 3



**4/4**

400 →

*Provide Executable Code for Input  
Blocking and Delayed Message*

500 →

502 →

*Receive Executable Code for Input  
Blocking and Delayed Message from  
Server Device*

504 →

*Block Client Device from Receiving  
User Input During its Communications  
with the Server Device*

506 →

*Present Message to User if any of the  
Communications Lasts Longer than a  
Specific Time*

**FIG. 4**